

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 28 TOWNSHIP 16 RANGE 2

DATE: --8-11-02-- 9-5-07

PARTY CHIEF: Wilcoxen

CREW:

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 5-14-01

IN. S.P.C. E ZONE NAD '83

NAME: 16022801

N: 506410.6560(m)

E: 43456.4970(m)

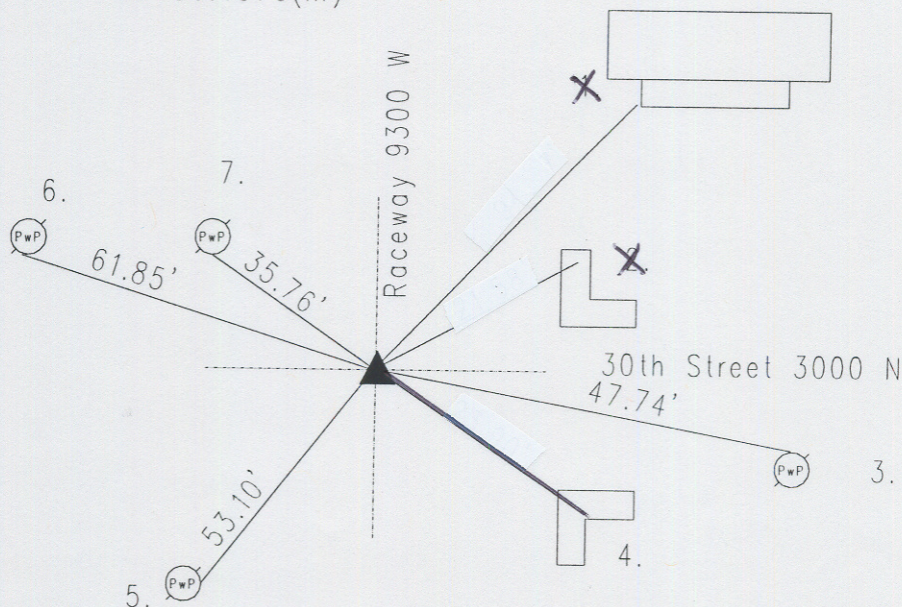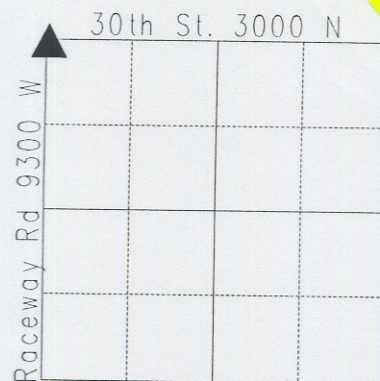

Original post set 1820 by Laughlin with witness: 6" walnut S 4 W 3 links; 9" ash N 4 E 8 links per Marion County Atlas pg. 3. Fatout 8-17-1852 called rock with witness: 18" sugar S 40 E 61 links; 1958 Monical called railroad spike. 6-15-70 SeFranka called PK nail. McLand 2-14-75 called same. Wilcoxen 2-4-76 called same. 9-16-85 Greene called the same. 11-28-89 Wilcoxen called same. 5-30-91 Wilcoxen excavated corner found nothing at surface. Stone found 18" down. Harrison set. Re-tied 8-2-96 by Wilcoxen. Re-tied 5-14-01 by kiste. Re-tied 8-11-02 by Wilcoxen.
16022801

REF.	DISTANCE	DESCRIPTION
1.	94.67'	SW corner of porch ADDRESS 3005
2.	21.58'	Cut 'x' N-end of concrete headwall
3.	47.74'	Mag nail w/brass washer N PwP#45-421 WB 6"up
4.	24.69'	Cut 'x' of concrete headwall
5.	53.10'	Mag nail w/brass washer E PwP#137-421 VA
6.	61.85'	Mag nail w/brass washer S PwP#19-421 VA
7.	35.76'	Mag nail w/brass washer SW PwP#20-421 VA